

Hi-MO 5m

LR5-54HPH 395~415M

- Suitable for distributed projects
- Advanced module technology delivers superior module efficiency
 - M10 Gallium-doped Wafer
 - Integrated segmented ribbons
 - 9-busbar Half-cut Cell
- Excellent outdoor power generation performance
- High module quality ensures long-term reliability



12-year Warranty for
Materials and Processing



25-year Warranty for Extra
Linear Power Output

Complete System and Product Certifications

IEC 61215, IEC 61730, UL 61730

ISO 9001:2015: ISO Quality Management System

ISO 14001: 2015: ISO Environment Management System

TS62941: Guideline for module design qualification and type approval

ISO 45001: 2018: Occupational Health and Safety

LONGi



21.3%

MAX MODULE

EFFICIENCY

0~3%

POWER

TOLERANCE

<2%

FIRST YEAR

POWER DEGRADATION

0.55%


YEAR 2-25

POWER DEGRADATION


HALF-CELL

Lower operating temperature

Additional Value

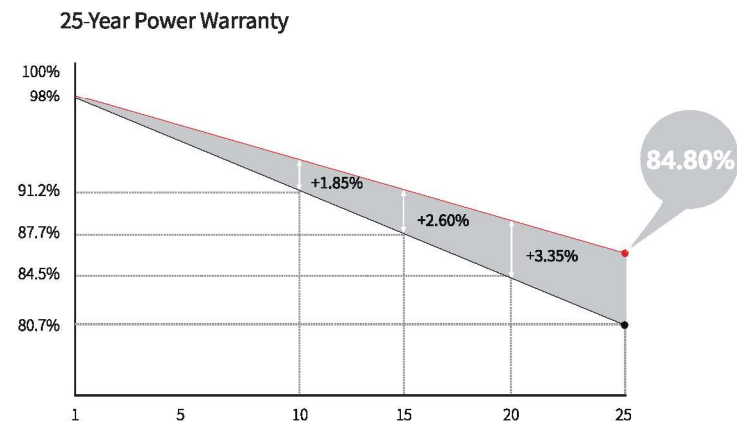

Mechanical Parameters	
Cell Orientation	108 (6×18)
Junction Box	IP68, three diodes
Output Cable	4mm², +400, -200mm length can be customized
Glass	Single glass, 3.2mm coated tempered glass
Frame	Anodized aluminum alloy frame
Weight	21.5kg
Dimension	1722×1134×30mm
Packaging	36pcs per pallet / 216pcs per 20' GP / 936pcs per 40' HC

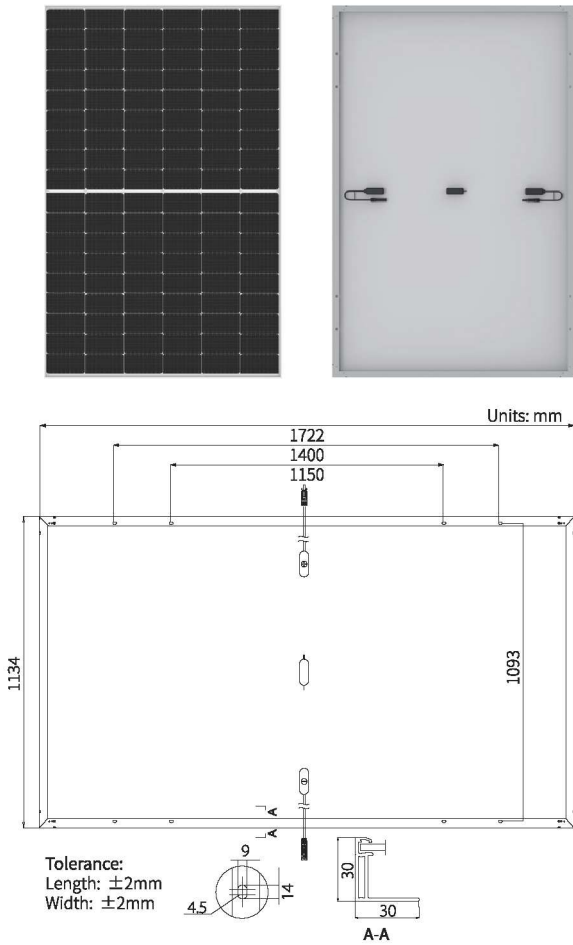

Electrical Characteristics	STC : AM1.5 1000W/m² 25°C				NOCT : AM1.5 800W/m² 20°C 1m/s				Test uncertainty for Pmax: ±3%	
	LR5-54HPH-395M		LR5-54HPH-400M		LR5-54HPH-405M		LR5-54HPH-410M		LR5-54HPH-415M	
Module Type	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Testing Condition										
Maximum Power (Pmax/W)	395	295.2	400	299.0	405	302.7	410	306.5	415	310.2
Open Circuit Voltage (Voc/V)	36.26	34.09	36.41	34.23	36.56	34.38	36.71	34.52	36.86	34.66
Short Circuit Current (Isc/A)	13.66	11.04	13.76	11.12	13.86	11.21	13.95	11.28	14.04	11.35
Voltage at Maximum Power (Vmp/V)	30.82	28.63	30.97	28.77	31.12	28.91	31.27	29.05	31.42	29.19
Current at Maximum Power (Imp/A)	12.82	10.31	12.92	10.39	13.02	10.48	13.12	10.55	13.21	10.63
Module Efficiency(%)	20.2		20.5		20.7		21.0		21.3	

Operating Parameters	
Operational Temperature	-40°C ~ +85°C
Power Output Tolerance	0 ~ 3%
Voc and Isc Tolerance	±3%
Maximum System Voltage	DC1500V (IEC/UL)
Maximum Series Fuse Rating	25A
Nominal Operating Cell Temperature	45±2°C
Protection Class	Class II
Fire Rating	UL type 1 or 2 IEC Class C

Mechanical Loading	
Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25mm Hailstone at the speed of 23m/s

Temperature Ratings (STC)	
Temperature Coefficient of Isc	+0.050%/°C
Temperature Coefficient of Voc	-0.265%/°C
Temperature Coefficient of Pmax	-0.340%/°C